

POULIES MOYEUX AMOVIBLES

- 8M -

Pour courroie largeur 20 mm														
	Code	Flasques	Type	Dents	Dp	De	Df	Dm	Di	F	P	L	Moyeu	Ales. Max
Fonte ou Acier	22-8M-20	B13	5F	22	56.02	54.65	60	-	41	28	6	22	1008	25
	24-8M-20	B15	5F	24	61.12	59.75	66	-	42	28	6	22	1108	28
	26-8M-20	B16	5F	26	66.21	64.84	71	-	46	28	6	22	1108	28
	28-8M-20	B17	5F	28	71.30	69.93	75	-	50	28	6	22	1108	28
	30-8M-20	B19	5F	30	76.40	75.03	83	-	58	28	6	22	1108	28
Acier	32-8M-20	B20	5F	32	81.49	80.12	87	-	62	28	3	25	1610	42
Fonte ou Acier	34-8M-20	B21	5F	34	86.58	85.21	91	-	65	28	3	25	1610	42
	36-8M-20	B23	5F	36	91.68	90.31	97	-	68	28	3	25	1610	42
	38-8M-20	B24	5F	38	96.77	95.40	103	-	72	28	3	25	1610	42
	40-8M-20	B25	5F	40	101.86	100.49	106	-	76	28	3	25	1610	42
	44-8M-20	B28	8F	44	112.05	110.68	119	93	-	28	4	32	2012	50
	48-8M-20	B30	8F	48	122.23	120.86	127	96	-	28	4	32	2012	50
	56-8M-20	B35	8F	56	142.61	141.24	148	110	-	28	4	32	2012	50
	64-8M-20	B38	8WF	64	162.98	161.61	168	110	137	28	4	32	2012	50
	72-8M-20	B41	8WF	72	183.35	181.98	192	110	158	28	4	32	2012	50
	80-8M-20	-	8W	80	203.72	202.35	-	110	180	28	4	32	2012	50
Fonte	90-8M-20	-	8A	90	229.19	227.82	-	110	204	28	4	32	2012	50


Pour courroie largeur 30 mm														
	Code	Flasques	Type	Dents	Dp	De	Df	Dm	Di	F	P	L	Moyeu	Ales. Max
Fonte ou Acier	22-8M-30	B13	5F	22	56.02	54.65	60	-	41	38	16	22	1008	25
	24-8M-30	B15	5F	24	61.12	59.75	66	-	42	38	16	22	1108	28
	26-8M-30	B16	5F	26	66.21	64.84	71	-	46	38	16	22	1108	28
	28-8M-30	B17	5F	28	71.30	69.93	75	-	50	38	13	25	1210	32
	30-8M-30	B19	3F	30	76.40	75.03	83	-	-	38	-	38	1615	42
Acier	32-8M-30	B20	3F	32	81.49	80.12	87	-	-	38	-	38	1615	42
Fonte ou Acier	34-8M-30	B21	3F	34	86.58	85.21	91	-	-	38	-	38	1615	42
	36-8M-30	B23	3F	36	91.68	90.31	97	-	-	38	-	38	1615	42
	38-8M-30	B24	3F	38	96.77	95.40	103	-	-	38	-	38	1615	42
	40-8M-30	B25	3F	40	101.86	100.49	106	-	-	38	-	38	1615	42
	44-8M-30	B28	4F	44	112.05	110.68	119	-	91	38	3	32	2012	50
	48-8M-30	B30	4F	48	122.23	120.86	127	-	95	38	3	32	2012	50
	56-8M-30	B35	4F	56	142.61	141.24	148	-	117	38	3	32	2012	50
	64-8M-30	B38	8F	64	162.98	161.61	168	125	-	38	7	45	2517	60
	72-8M-30	B41	8WF	72	183.35	181.98	192	125	158	38	7	45	2517	60
	80-8M-30	-	8W	80	203.72	202.35	-	125	180	38	7	45	2517	60
Fonte	90-8M-30	-	8A	90	229.19	227.82	-	125	204	38	7	45	2517	60
	112-8M-30	-	8A	112	285.21	283.84	-	125	260	38	7	45	2517	60
	144-8M-30	-	8A	144	366.70	365.33	-	125	341	38	7	45	2517	60

POULIES MOYEUX AMOVIBLES

- 8M -

Pour courroie largeur 50 mm														
Acier	Code	Flasques	Type	Dents	Dp	De	Df	Dm	Di	F	P	L	Moyeu	Ales. Max
Acier	28-8M-50	B17	5F	28	71.30	69.93	75	-	50	60	35	25	1210	32
	30-8M-50	B19	5F	30	76.40	75.03	83	-	58	60	22	38	1615	42
Fonte ou Acier	32-8M-50	B20	5F	32	81.49	80.12	87	-	62	60	22	38	1615	42
	34-8M-50	B21	5F	34	86.58	85.21	91	-	65	60	22	38	1615	42
	36-8M-50	B23	5F	36	91.68	90.31	97	-	68	60	22	38	1615	42
	38-8M-50	B24	5F	38	96.77	95.40	103	-	72	60	22	38	1615	42
	40-8M-50	B25	4F	40	101.86	100.49	106	-	82	60	14	32	2012	50
	44-8M-50	B28	4F	44	112.05	110.68	119	-	91	60	14	32	2012	50
	48-8M-50	B30	4F	48	122.23	120.86	127	-	95	60	14	32	2012	50
	56-8M-50	B35	4F	56	142.61	141.24	148	-	116	60	7.5	45	2517	60
	64-8M-50	B38	4F	64	162.98	161.61	168	-	137	60	7.5	45	2517	60
	72-8M-50	B41	9WF	72	183.35	181.98	192	125	158	60	7.5	45	2517	60
	80-8M-50	-	4	80	203.72	202.35	-	-	180	60	4.5	51	3020	75
	90-8M-50	-	9W	90	229.19	227.82	-	170	204	60	4.5	51	3020	75
Fonte	112-8M-50	-	9W	112	285.21	283.84	-	170	260	60	4.5	51	3020	75
	144-8M-50	-	9A	144	366.70	365.33	-	170	341	60	4.5	51	3020	75
	168-8M-50	-	7A	168	427.82	426.45	-	190	402	60	2.5	65	3525	90
	192-8M-50	-	7A	192	488.94	487.57	-	190	450	60	2.5	65	3525	90

Pour courroie largeur 85 mm														
Acier	Code	Flasques	Type	Dents	Dp	De	Df	Dm	Di	F	P	L	Moyeu	Ales. Max
Fonte ou Acier	34-8M-85	B21	4F	34	86.58	85.21	91	-	65	95	28.5	38	1615	42
	36-8M-85	B23	4F	36	91.68	90.31	97	-	68	95	28.5	38	1615	42
	38-8M-85	B24	4F	38	96.77	95.40	103	-	72	95	28.5	38	1615	42
	40-8M-85	B25	4F	40	101.86	100.49	106	-	82	95	31.5	32	2012	50
	44-8M-85	B28	4F	44	112.05	110.68	119	-	91	95	31.5	32	2012	50
	48-8M-85	B30	4F	48	122.23	120.86	127	-	100	95	25	45	2517	60
	56-8M-85	B35	4F	56	142.61	141.24	148	-	117	95	25	45	2517	60
	64-8M-85	B38	4F	64	162.98	161.61	168	-	137	95	25	45	2517	60
	72-8M-85	B41	4F	72	183.35	181.98	192	-	158	95	22	51	3020	75
	80-8M-85	-	4	80	203.72	202.35	-	-	180	95	22	51	3020	75
Fonte	90-8M-85	-	9W	90	229.19	227.82	-	170	204	95	22	51	3020	75
	112-8M-85	-	9W	112	285.21	283.84	-	170	260	95	22	51	3020	75
	144-8M-85	-	9A	144	366.70	365.33	-	190	341	95	15	65	3525	90
	168-8M-85	-	9A	168	427.82	426.45	-	190	402	95	15	65	3525	90
	192-8M-85	-	9A	192	488.94	487.57	-	190	450	95	15	65	3525	90

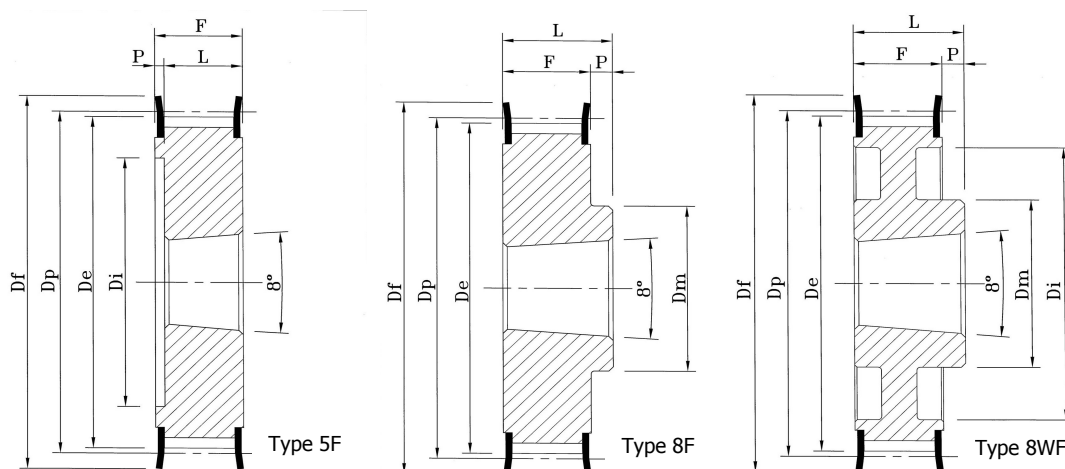

POULIES MOYEUX AMOVIBLES

- 8M -

