

POULIES MOYEUX AMOVIBLES

- H -

Pour courroie largeur 25,4 mm														
	Code	Flasques	Type	Dents	Dp	De	Df	Dm	Di	F	P	L	Moyeu	Ales. Max
Fonte ou Acier	16 H 100 F	B16	5F	16	64.68	63.30	71	-	45	31	9	22	1108	28
	18 H 100 F	B18	5F	18	72.71	71.39	79	-	52	31	6	25	1210	32
	19 H 100 F	B19	5F	19	76.81	75.43	83	-	56	31	6	25	1210	32
	20 H 100 F	B20	5F	20	80.85	79.47	87	-	60	31	6	25	1210	32
	21 H 100 F	B21	5F	21	84.90	83.52	91	-	63	32	7	25	1210	32
	22 H 100 F	B22	5F	22	88.94	87.56	93	-	67	32	7	25	1210	32
	23 H 100 F	B23	5F	23	92.98	91.60	97	-	71	32	7	25	1610	42
	24 H 100 F	B24	5F	24	97.02	95.64	103	-	75	32	7	25	1610	42
	25 H 100 F	B25	5F	25	101.07	99.69	106	-	79	32	7	25	1610	42
	26 H 100 F	B26	5F	26	105.11	103.73	111	-	83	32	7	25	1610	42
	27 H 100 F	B27	5F	27	109.15	107.77	115	-	87	32	7	25	1610	42
	28 H 100 F	B28	5F	28	113.19	111.81	119	-	91	32	7	25	1610	42
	30 H 100 F	B30	5F	30	121.28	119.90	127	-	99	32	7	25	1610	42
	32 H 100 F	B32	5F	32	129.36	127.98	135	92	108	32	7	25	1610	42
	36 H 100 F	B36	5WF	36	145.54	144.16	152	92	124	32	7	25	1610	42
	40 H 100 F	B38	5WF	40	161.71	160.33	168	92	140	32	7	25	1610	42
Fonte	44 H 100 F	B40	3WF	44	177.88	176.50	184	106	152	32	-	32	2012	50
	48 H 100 F	B42	3WF	48	194.05	192.67	200	106	169	32	-	32	2012	50
	60 H 100	-	9A	60	242.56	241.18	-	106	223	34	1	32	2012	50
	72 H 100	-	9A	72	291.07	289.69	-	106	270	34	1	32	2012	50
	84 H 100	-	9A	84	339.58	338.20	-	106	320	34	1	32	2012	50
	96 H 100	-	7A	96	388.09	386.71	-	119	366	34	5.5	45	2517	60
	120 H 100	-	7A	120	485.12	483.74	-	119	462	34	5.5	45	2517	60

Pour courroie largeur 38,1 mm														
	Code	Flasques	Type	Dents	Dp	De	Df	Dm	Di	F	P	L	Moyeu	Ales. Max
Fonte ou Acier	18 H 150 F	B18	5F	18	72.77	71.39	79	-	53	45	20	25	1210	32
	19 H 150 F	B19	5F	19	76.81	75.43	83	-	56	45	20	25	1210	32
	20 H 150 F	B20	5F	20	80.85	79.47	87	-	60	45	20	25	1210	32
	21 H 150 F	B21	5F	21	84.90	83.52	91	-	64	45	20	25	1210	32
	22 H 150 F	B22	5F	22	88.94	87.56	93	-	68	45	20	25	1210	32
	23 H 150 F	B23	5F	23	92.98	91.60	97	-	71	45	20	25	1610	42
	24 H 150 F	B24	5F	24	97.02	95.64	103	-	74	45	20	25	1610	42
	25 H 150 F	B25	5F	25	101.07	99.69	106	-	78	45	20	25	1610	42
	26 H 150 F	B26	5F	26	105.11	103.73	111	-	82	45	20	25	1610	42
	27 H 150 F	B27	5F	27	109.15	107.77	115	-	87	45	20	25	1610	42
	28 H 150 F	B28	5F	28	113.19	111.81	119	-	91	45	20	25	1610	42
	30 H 150 F	B30	5F	30	121.28	119.90	127	-	99	45	20	25	1610	42
	32 H 150 F	B32	5WF	32	129.36	127.98	135	92	108	45	20	25	1610	42
	36 H 150 F	B36	5WF	36	145.54	144.16	152	92	124	45	20	25	1610	42
	40 H 150 F	B38	5WF	40	161.71	160.33	168	92	140	45	20	25	1610	42
	44 H 150 F	B40	5WF	44	177.88	176.50	184	106	153	45	13	32	2012	50
	48 H 150 F	B42	5WF	48	194.05	192.67	200	106	169	45	13	32	2012	50
Fonte	60 H 150	-	9A	60	242.56	241.18	-	106	223	46	7	32	2012	50
	72 H 150	-	9A	72	291.07	289.69	-	106	270	46	7	32	2012	50
	84 H 150	-	9A	84	339.58	338.20	-	106	320	46	7	32	2012	50
	96 H 150	-	9A	96	388.09	386.71	-	119	366	46	0.5	45	2517	60
	120 H 150	-	9A	120	485.12	483.74	-	119	462	46	0.5	45	2517	60

POULIES MOYEUX AMOVIBLES


- H -

Pour courroie largeur 50,8 mm														
	Code	Flasques	Type	Dents	Dp	De	Df	Dm	Di	F	P	L	Moyeu	Ales. Max
Fonte ou Acier	18 H 200 F	B18	5F	18	72.77	71.39	79	-	52	58	33	25	1210	32
	19 H 200 F	B19	5F	19	76.81	75.43	83	-	56	58	33	25	1210	32
	20 H 200 F	B20	5F	20	80.85	79.47	87	-	60	58	33	25	1610	42
	21 H 200 F	B21	5F	21	84.90	83.52	91	-	64	58	33	25	1610	42
	22 H 200 F	B22	5F	22	88.94	87.56	93	-	68	58	33	25	1610	42
	23 H 200 F	B23	5F	23	92.98	91.60	97	-	71	58	33	25	1610	42
	24 H 200 F	B24	5F	24	97.02	95.64	103	-	74	58	33	25	1610	42
	25 H 200 F	B25	5F	25	101.07	99.69	106	-	78	58	33	25	1610	42
	26 H 200 F	B26	5F	26	105.11	103.73	111	-	82	58	33	25	1610	42
	27 H 200 F	B27	5F	27	109.15	107.77	115	-	87	58	33	25	1610	42
	28 H 200 F	B28	5F	28	113.19	111.81	119	-	91	58	33	25	1610	42
	30 H 200 F	B30	5F	30	121.28	119.90	127	-	99	58	33	25	1610	42
	32 H 200 F	B32	5F	32	129.36	127.98	135	-	107	58	26	32	2012	50
	36 H 200 F	B36	5WF	36	145.54	144.16	152	102	124	58	26	32	2012	50
	40 H 200 F	B38	5WF	40	161.71	160.33	168	106	140	58	26	32	2012	50
	44 H 200 F	B40	5WF	44	177.88	176.50	184	106	152	58	26	32	2012	50
	48 H 200 F	B42	5WF	48	194.05	192.67	200	119	169	58	13	45	2517	60
Fonte	60 H 200	-	9A	60	242.56	241.18	-	119	223	60	7.5	45	2517	60
	72 H 200	-	9A	72	291.07	289.69	-	119	270	60	7.5	45	2517	60
	84 H 200	-	9A	84	339.58	338.20	-	119	320	60	7.5	45	2517	60
	96 H 200	-	9A	96	388.09	386.71	-	119	366	60	7.5	45	2517	60
	120 H 200	-	9A	120	485.12	483.74	-	119	462	60	7.5	45	2517	60


Pour courroie largeur 76,2 mm														
	Code	Flasques	Type	Dents	Dp	De	Df	Dm	Di	F	P	L	Moyeu	Ales. Max
Fonte ou Acier	20 H 300 F	B20	4F	20	80.85	79.47	87	-	65	84	23	38	1615	42
	21 H 300 F	B21	4F	21	84.90	83.52	91	-	66	84	23	38	1615	42
	22 H 300 F	B22	4F	22	88.94	87.56	93	-	67	84	23	38	1615	42
	23 H 300 F	B23	4F	23	92.98	91.60	97	-	71	84	23	38	1615	42
	24 H 300 F	B24	4F	24	97.02	95.64	103	-	75	84	23	38	1615	42
	25 H 300 F	B25	4F	25	101.07	99.69	106	-	79	84	23	38	1615	42
	26 H 300 F	B26	4F	26	105.11	103.73	111	-	83	84	23	38	1615	42
	27 H 300 F	B27	4F	27	109.15	107.77	115	-	87	84	26	32	2012	50
	28 H 300 F	B28	4F	28	113.19	111.81	119	-	91	84	26	32	2012	50
	30 H 300 F	B30	4F	30	121.28	119.90	127	-	99	84	26	32	2012	50
	32 H 300 F	B32	4F	32	129.36	127.98	135	-	107	84	19.5	45	2517	60
	36 H 300 F	B36	4F	36	145.54	144.16	152	-	124	84	19.5	45	2517	60
	40 H 300 F	B38	4F	40	161.71	160.33	168	-	137	84	19.5	45	2517	60
	44 H 300 F	B40	9WF	44	177.88	176.50	184	119	152	86	20.5	45	2517	60
	48 H 300 F	B42	9WF	48	194.05	192.67	200	119	169	86	20.5	45	2517	60
Fonte	60 H 300	-	9A	60	242.56	241.18	-	119	223	86	20.5	45	2517	60
	72 H 300	-	9A	72	291.07	289.69	-	119	270	86	20.5	45	2517	60
	84 H 300	-	9A	84	339.58	338.20	-	119	320	86	20.5	45	2517	60
	96 H 300	-	9A	96	388.09	386.71	-	150	366	86	5	76	3030	75
	120 H 300	-	9A	120	485.12	483.74	-	150	462	86	5	76	3030	75

POULIES MOYEUX AMOVIBLES


- H -

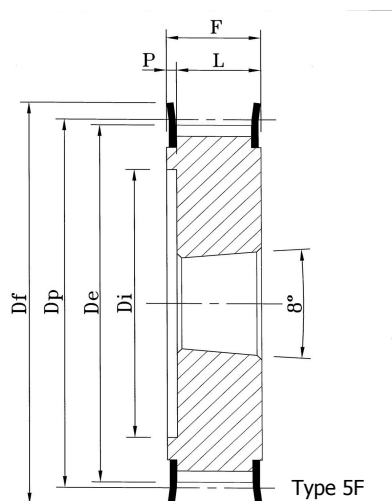


Type 5F

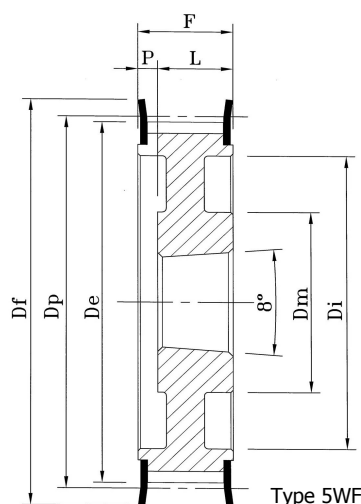


Type 5WF

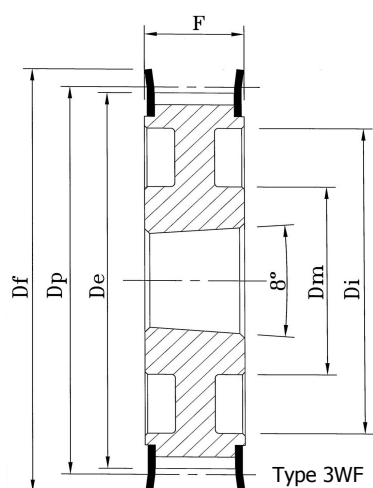


Type 3WF

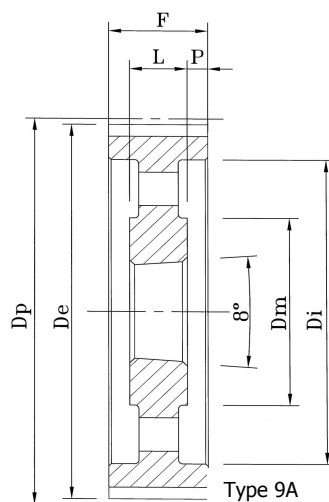


Type 9A

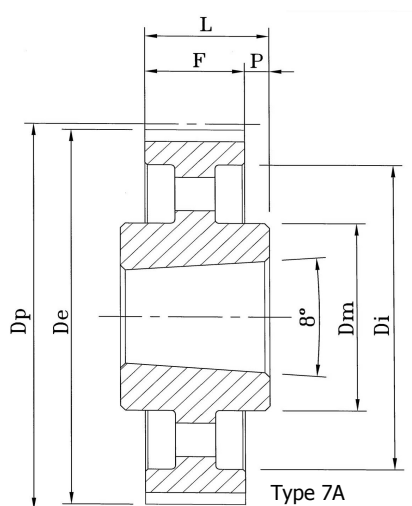

Type 7A

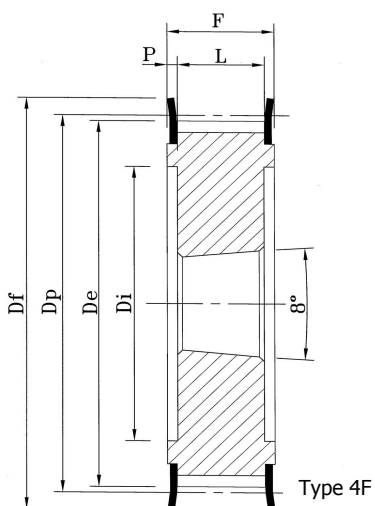

Type 4F

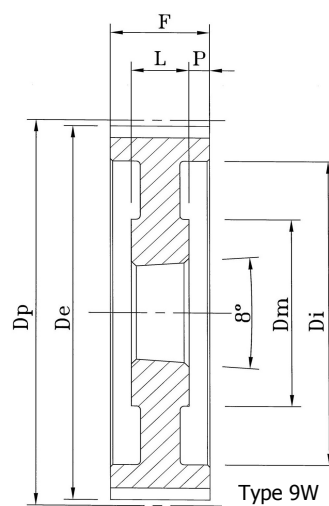

Type 9W