

POULIES PRÉALÉSÉES

- 8M -

Pour courroie largeur 20 mm												
	Code	Flasques	Type	Dents	Dp	De	Df	Dm	Di	F	L	d
Acier	22-8M-20	B13	6F	22	56.02	54.65	60	43	-	28	38	12
	24-8M-20	B15	6F	24	61.12	59.75	66	45	-	28	38	12
	26-8M-20	B16	6F	26	66.21	64.84	71	50	-	28	38	12
	28-8M-20	B17	6F	28	71.30	69.93	75	50	-	28	38	15
	30-8M-20	B19	6F	30	76.40	75.03	83	55	-	28	38	15
	32-8M-20	B20	6F	32	81.49	80.12	87	60	-	28	38	15
	34-8M-20	B21	6F	34	86.58	85.21	91	70	-	28	38	15
	36-8M-20	B23	6F	36	91.68	90.31	97	70	-	28	38	15
	38-8M-20	B24	6F	38	96.77	95.40	103	75	-	28	38	15
Fonte ou Acier	40-8M-20	B25	6F	40	101.86	100.49	106	75	-	28	38	15
	44-8M-20	B28	6F	44	112.05	110.68	119	75	-	28	38	15
	48-8M-20	B30	6F	48	122.23	120.86	127	75	-	28	38	15
	56-8M-20	B35	6WF	56	142.61	141.24	148	80	117	28	38	15
	64-8M-20	B38	6WF	64	162.98	161.61	168	80	137	28	38	15
	72-8M-20	B41	6WF	72	183.35	181.98	192	80	158	28	38	15
Fonte	80-8M-20	-	6A	80	203.72	202.35	-	90	180	28	38	15
	90-8M-20	-	6A	90	229.19	227.82	-	90	204	28	38	15
	112-8M-20	-	6A	112	285.21	283.84	-	90	260	28	38	18
	144-8M-20	-	6A	144	366.70	365.33	-	90	341	28	38	20
	168-8M-20	-	6A	168	427.82	426.45	-	100	402	28	38	20
	192-8M-20	-	6A	192	488.94	487.57	-	100	450	28	38	20

Pour courroie largeur 30 mm												
	Code	Flasques	Type	Dents	Dp	De	Df	Dm	Di	F	L	d
Acier	22-8M-30	B13	6F	22	56.02	54.65	60	43	-	38	48	12
	24-8M-30	B15	6F	24	61.12	59.75	66	45	-	38	48	12
	26-8M-30	B16	6F	26	66.21	64.84	71	50	-	38	48	12
	28-8M-30	B17	6F	28	71.30	69.93	75	50	-	38	48	15
	30-8M-30	B19	6F	30	76.40	75.03	83	55	-	38	48	15
	32-8M-30	B20	6F	32	81.49	80.12	87	60	-	38	48	15
	34-8M-30	B21	6F	34	86.58	85.21	91	70	-	38	48	15
	36-8M-30	B23	6F	36	91.68	90.31	97	70	-	38	48	15
	38-8M-30	B24	6F	38	96.77	95.40	103	75	-	38	48	15
Fonte ou Acier	40-8M-30	B25	6F	40	101.86	100.49	106	75	-	38	48	15
	44-8M-30	B28	6F	44	112.05	110.68	119	75	-	38	48	15
	48-8M-30	B30	6F	48	122.23	120.86	127	75	-	38	48	15
	56-8M-30	B35	6WF	56	142.61	141.24	148	90	117	38	48	15
	64-8M-30	B38	6WF	64	162.98	161.61	168	90	137	38	48	15
	72-8M-30	B41	6WF	72	183.35	181.98	192	95	158	38	48	15
Fonte	80-8M-30	-	6A	80	203.72	202.35	-	100	180	38	48	15
	90-8M-30	-	6A	90	229.19	227.82	-	100	204	38	48	15
	112-8M-30	-	6A	112	285.21	283.84	-	100	260	38	48	18
	144-8M-30	-	6A	144	366.70	365.33	-	100	341	38	48	20
	168-8M-30	-	6A	168	427.82	426.45	-	100	402	38	48	20
	192-8M-30	-	6A	192	488.94	487.57	-	100	460	38	48	20

POULIES PRÉALÉSÉES


- 8M -

Pour courroie largeur 50 mm												
	Code	Flasques	Type	Dents	Dp	De	Df	Dm	Di	F	L	d
Acier	22-8M-50	B13	6F	22	56.02	54.65	60	43	-	60	70	12
	24-8M-50	B15	6F	24	61.12	59.75	66	45	-	60	70	12
	26-8M-50	B16	6F	26	66.21	64.84	71	50	-	60	70	12
	28-8M-50	B17	6F	28	71.30	69.93	75	50	-	60	70	15
	30-8M-50	B19	6F	30	76.40	75.03	83	55	-	60	70	15
	32-8M-50	B20	6F	32	81.49	80.12	87	60	-	60	70	15
	34-8M-50	B21	6F	34	86.58	85.21	91	70	-	60	70	15
	36-8M-50	B23	6F	36	91.68	90.31	97	70	-	60	70	15
	38-8M-50	B24	6F	38	96.77	95.40	103	75	-	60	70	15
Fonte ou Acier	40-8M-50	B25	6F	40	101.86	100.49	106	75	-	60	70	20/18
	44-8M-50	B28	6F	44	112.05	110.68	119	75	-	60	70	20/18
	48-8M-50	B30	6F	48	122.23	120.86	127	80	-	60	70	20/18
	56-8M-50	B35	10WF	56	142.61	141.24	148	90	117	60	60	20/18
	64-8M-50	B38	10WF	64	162.98	161.61	168	100	137	60	60	20/18
	72-8M-50	B41	10WF	72	183.35	181.98	192	100	158	60	60	20/18
Fonte	80-8M-50	-	10A	80	203.72	202.35	-	110	180	60	60	20/18
	90-8M-50	-	10A	90	229.19	227.82	-	110	204	60	60	20/18
	112-8M-50	-	10A	112	285.21	283.84	-	110	260	60	60	20/18
	144-8M-50	-	10A	144	366.7	365.33	-	110	341	60	60	20
	168-8M-50	-	10A	168	427.82	426.45	-	120	402	60	60	20
	192-8M-50	-	10A	192	488.94	487.57	-	130	460	60	60	20


Pour courroie largeur 85 mm												
	Code	Flasques	Type	Dents	Dp	De	Df	Dm	Di	F	L	d
Acier	22-8M-85	B13	6F	22	56.02	54.65	60	43	-	95	105	12
	24-8M-85	B15	6F	24	61.12	59.75	66	45	-	95	105	12
	26-8M-85	B16	6F	26	66.21	64.84	71	50	-	95	105	12
	28-8M-85	B17	6F	28	71.30	69.93	75	50	-	95	105	15
	30-8M-85	B19	6F	30	76.40	75.03	83	55	-	95	105	15
	32-8M-85	B20	6F	32	81.49	80.12	87	60	-	95	105	15
	34-8M-85	B21	6F	34	86.58	85.21	91	70	-	95	105	15
	36-8M-85	B23	6F	36	91.68	90.31	97	70	-	95	105	15
	38-8M-85	B24	6F	38	96.77	95.40	103	75	-	95	105	15
Fonte ou Acier	40-8M-85	B25	6F	40	101.86	100.49	106	75	-	95	105	20/18
	44-8M-85	B28	6F	44	112.05	110.68	119	75	-	95	105	20/18
	48-8M-85	B30	6F	48	122.23	120.86	127	80	-	95	105	20/18
	56-8M-85	B35	6F	56	142.61	141.24	148	80	-	95	105	20/18
	64-8M-85	B38	10WF	64	162.98	161.61	168	100	137	95	95	20/18
	72-8M-85	B41	10WF	72	183.35	181.98	192	110	158	95	95	20/18
Fonte	80-8M-85	-	10A	80	203.72	202.35	-	110	180	95	95	20/18
	90-8M-85	-	10A	90	229.19	227.82	-	110	204	95	95	20/18
	112-8M-85	-	10A	112	285.21	283.84	-	110	260	95	95	20/18
	144-8M-85	-	10A	144	366.70	365.33	-	120	371	95	95	20
	168-8M-85	-	10A	168	427.82	426.45	-	120	402	95	95	20
	192-8M-85	-	10A	192	488.94	487.57	-	130	460	95	95	20

POULIES PRÉALÉSÉES


- 8M -

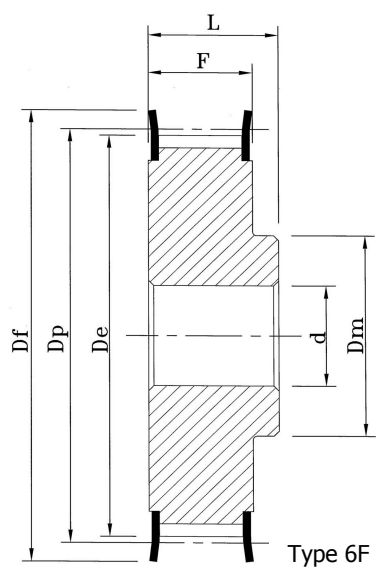


Type 6F

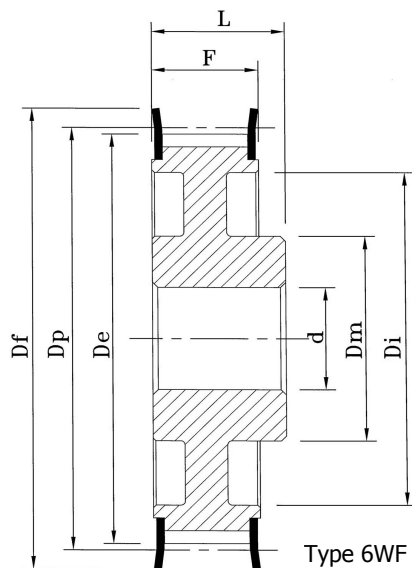


Type 6WF

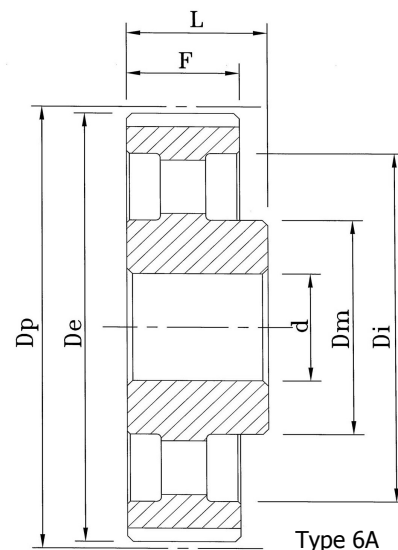

Type 6A

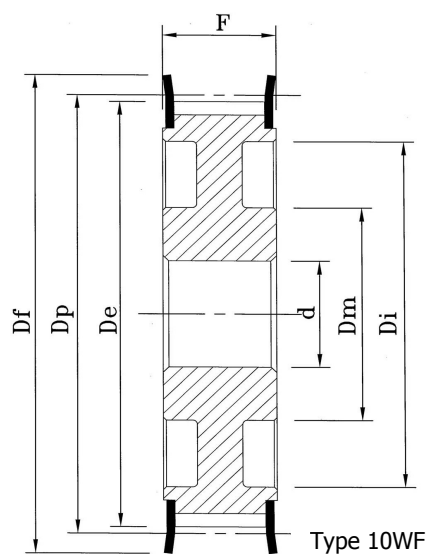

Type 10WF

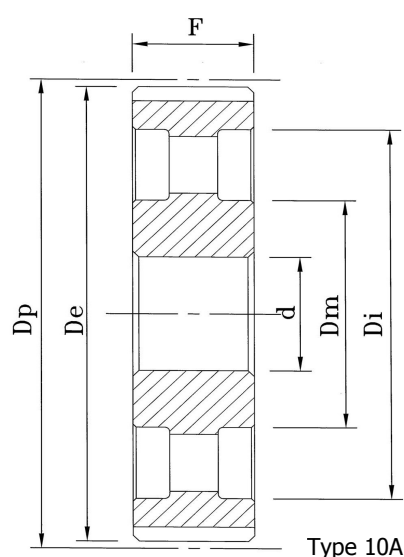

Type 10A